



Q² 2013




Wall lighting fixture for interiors, with indirect light emission.
Die-cast aluminium wall bracket in polyacrylic paint.
Extruded aluminium structure in matt white or titanium polyacrylic paint.

○ TECHNICAL DATA




Code	A09801.002.0106
System power consumption	32W
Efficacy	94.38lm/W
Light source	LED
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	3020lm
Lumen output	3020lm
Efficiency	100.000%
Weight	2,0250Kg
Protection degree	IP20
Colour tolerances	SDCM3
Packing dimensions (cm)	28 x 37 x 16

○ POLAR DIAGRAM

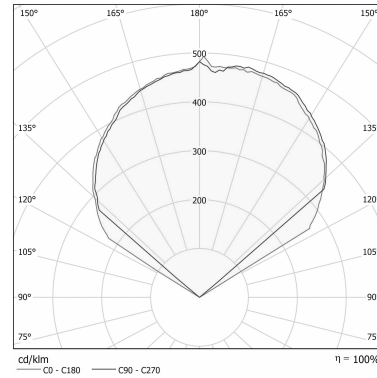

○ TECHNICAL DRAWING

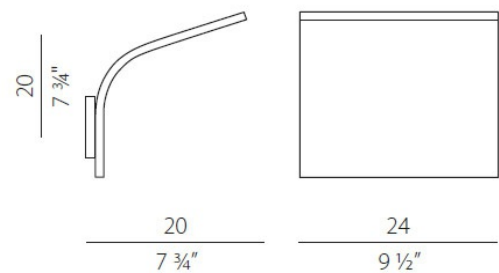

○ COLOUR

matt white





Q2 2013

○ ACCESSORIES

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

